

## YY-C581 Mini iTX Tiny Case



- **Compact and Cost Effective**
  - 5.9L without Front Bezel
  - 6.3L with Front Bezel
- **Flexible Drive Cage-fulfill various application**
- **Easy assembly design**

### SPECIFICATIONS

<b>Case dimension (with bezel)</b>	250mm W x 273mm D x 95mm H 9.8"W x 10.7"D x 3.7"H
<b>Motherboard configuration</b>	Mini-ITX
<b>Drive configuration</b>	Flexible combinations
<b>System cooling fans</b>	1 * 8015mm DC fan
<b>Front panel control</b>	USB2.0x2, HD-Audio, Power SW, Power LED, HDD LED
<b>Color</b>	Black Chassis /Polish Black Bezel or Silver Gray
<b>Power Supply</b>	Flex 100~150W
<b>Options</b>	SATA Cable, Slim SATA Adaptor, Riser Card, Metal Cover
<b>Net Weight</b>	1.55kgs/3.41lbs without power supply
<b>Shipping/Packing</b>	0.61cuft/Single packed carton
	1800pcs/20'container
	3900pcs/40'container

## Mini ITX platform YY-C5 series Tiny Case



### Drive Cage A+b

Allowing to assembly a slim ODD and a 3.5" card reader



### Drive Cage A

Allowing to assembly a standard 5.25" Optical Drive or a 3.5"HDD



Convertible Drive Cage



57mm KOZ Illustration

chassis build in Intel DQ45EK with Intel boxed Core 2 Duo Processor (TDP 65W)

## Convertible Drive Cage

to fulfill different system configurations for various applications

System Configuration	#1	#2	#3	#4
<b>Drive Cage Assembly</b>	<b>A</b>		<b>A+B</b>	
5.25"ODD	1			
Slim ODD			1	1
3.5"Exposed			1	
3.5"HDD		1		
2.5"HDD	2	2	2	3
LP PCI card	1	1	1	1
M/B KOZ 57mm max	V	V	V	V
M/B KOZ 34mm max	V	V	V	V


### M/B KOZ (Keep Out Zone) :

Means the component height limitation on board, including RAM, Processor and chips, FHS (Fan and Heat Sink)

**57mm KOZ** covering Intel boxed CPU and FHS

**34mm KOZ** means the highest component on board is about the same height as RAM (DDRII, DDRIII)

## YY-C582 Mini iTX Tiny Case

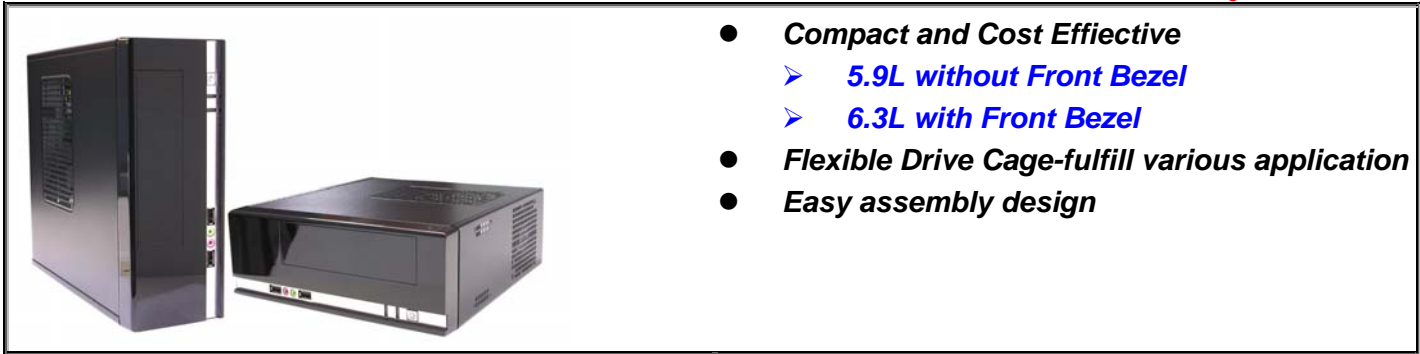

- **Compact and Cost Effective**
  - 5.9L without Front Bezel
  - 6.3L with Front Bezel
- **Flexible Drive Cage-fulfill various application**
- **Easy assembly design**

### SPECIFICATIONS

<b>Case dimension (with bezel)</b>	250mm W x 273mm D x 95mm H 9.8"W x 10.7"D x 3.7"H
<b>Motherboard configuration</b>	Mini-ITX
<b>Drive configuration</b>	Flexible combinations
<b>System cooling fans</b>	1 * 8015mm DC fan
<b>Front panel control</b>	USB2.0x2, HD-Audio, Power SW, Power LED, HDD LED
<b>Color</b>	Black Chassis /Polish Black Bezel with Sliver Bar
<b>Power Supply</b>	Flex 100~150W
<b>Options</b>	SATA Cable, Slim SATA Adaptor, Riser Card, Metal Cover
<b>Net Weight</b>	1.55kgs/3.41lbs without power supply
<b>Shipping/Packing</b>	0.61cuf't/Single packed carton
	1880pcs/20'container
	3900pcs/40'container

## Mini ITX platform YY-C5 series Tiny Case



### Drive Cage A+b

Allowing to assembly a slim ODD and a 3.5" card reader



### Drive Cage A

Allowing to assembly a standard 5.25" Optical Drive or a 3.5"HDD



Convertible Drive Cage



57mm KOZ Illustration

chassis build in Intel DQ45EK with Intel boxed Core 2 Duo Processor (TDP 65W)

## Convertible Drive Cage

to fulfill different system configurations for various applications

System Configuration	#1	#2	#3	#4
<b>Drive Cage Assembly</b>	<b>A</b>		<b>A+B</b>	
5.25"ODD	1			
Slim ODD			1	1
3.5"Exposed			1	
3.5"HDD		1		
2.5"HDD	2	2	2	3
LP PCI card	1	1	1	1
M/B KOZ 57mm max		V	V	V
M/B KOZ 34mm max	V	V	V	V

### M/B KOZ (Keep Out Zone) :

Means the component height limitation on board, including RAM, Processor and chips, FHS (Fan and Heat Sink)

**57mm KOZ** covering Intel boxed CPU and FHS

**34mm KOZ** means the highest component on board is about the same height as RAM (DDRII, DDRIII)